




ege

ALTERNATİF MÜHENDİSLİK

"PROFESYONEL KÜP KESİM MAKİNELERİ"

"İşimiz küp kesim"

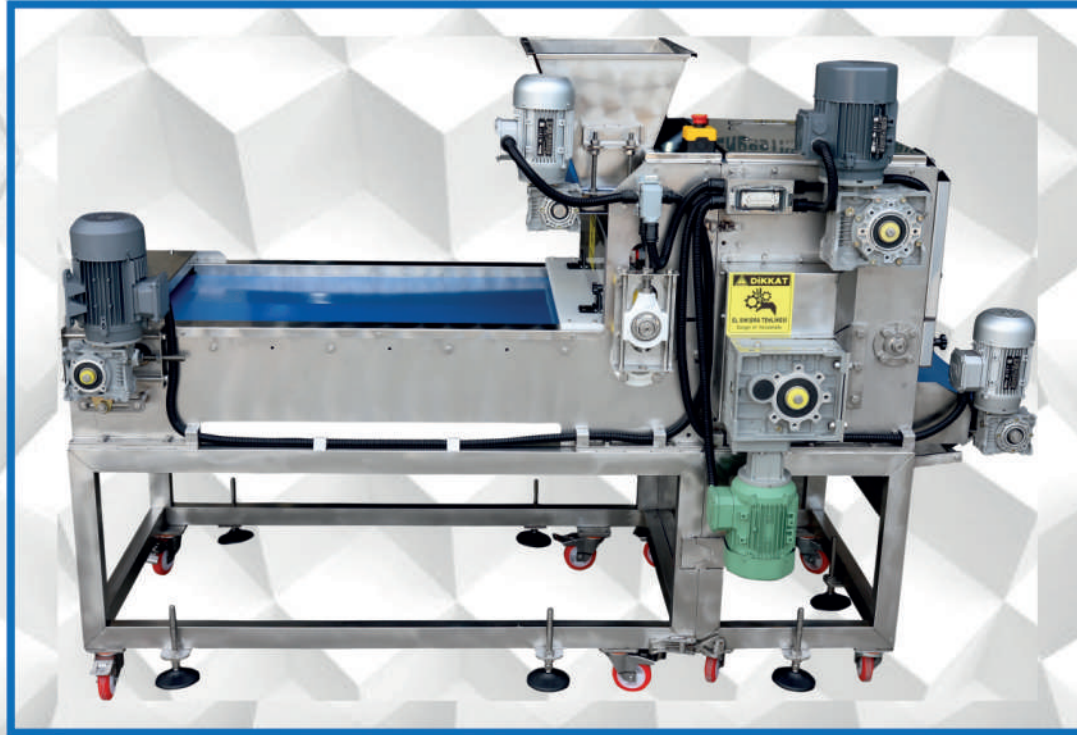

K.E.S.S 5307 SK. NO:89/A Yunusemre - Manisa / TÜRKİYE
Tel : +90 236 233 92 80 • +90 236 233 30 20 • +90 533 399 03 98
e-mail : iletisim@egealternatif.com.tr
www.egealternatif.com.tr

"İşimiz küp kesim"




ege

ALTERNATİF MÜHENDİSLİK

"PROFESYONEL KÜP KESİM MAKİNELERİ"

K.E.S.S 5307 Sk. No: 89/A Yunusemre - Manisa / TÜRKİYE
Tel : +90 236 233 92 80 • +90 236 233 30 20 • +90 533 399 03 98
e-mail : iletisim@egealternatif.com.tr
www.egealternatif.com.tr

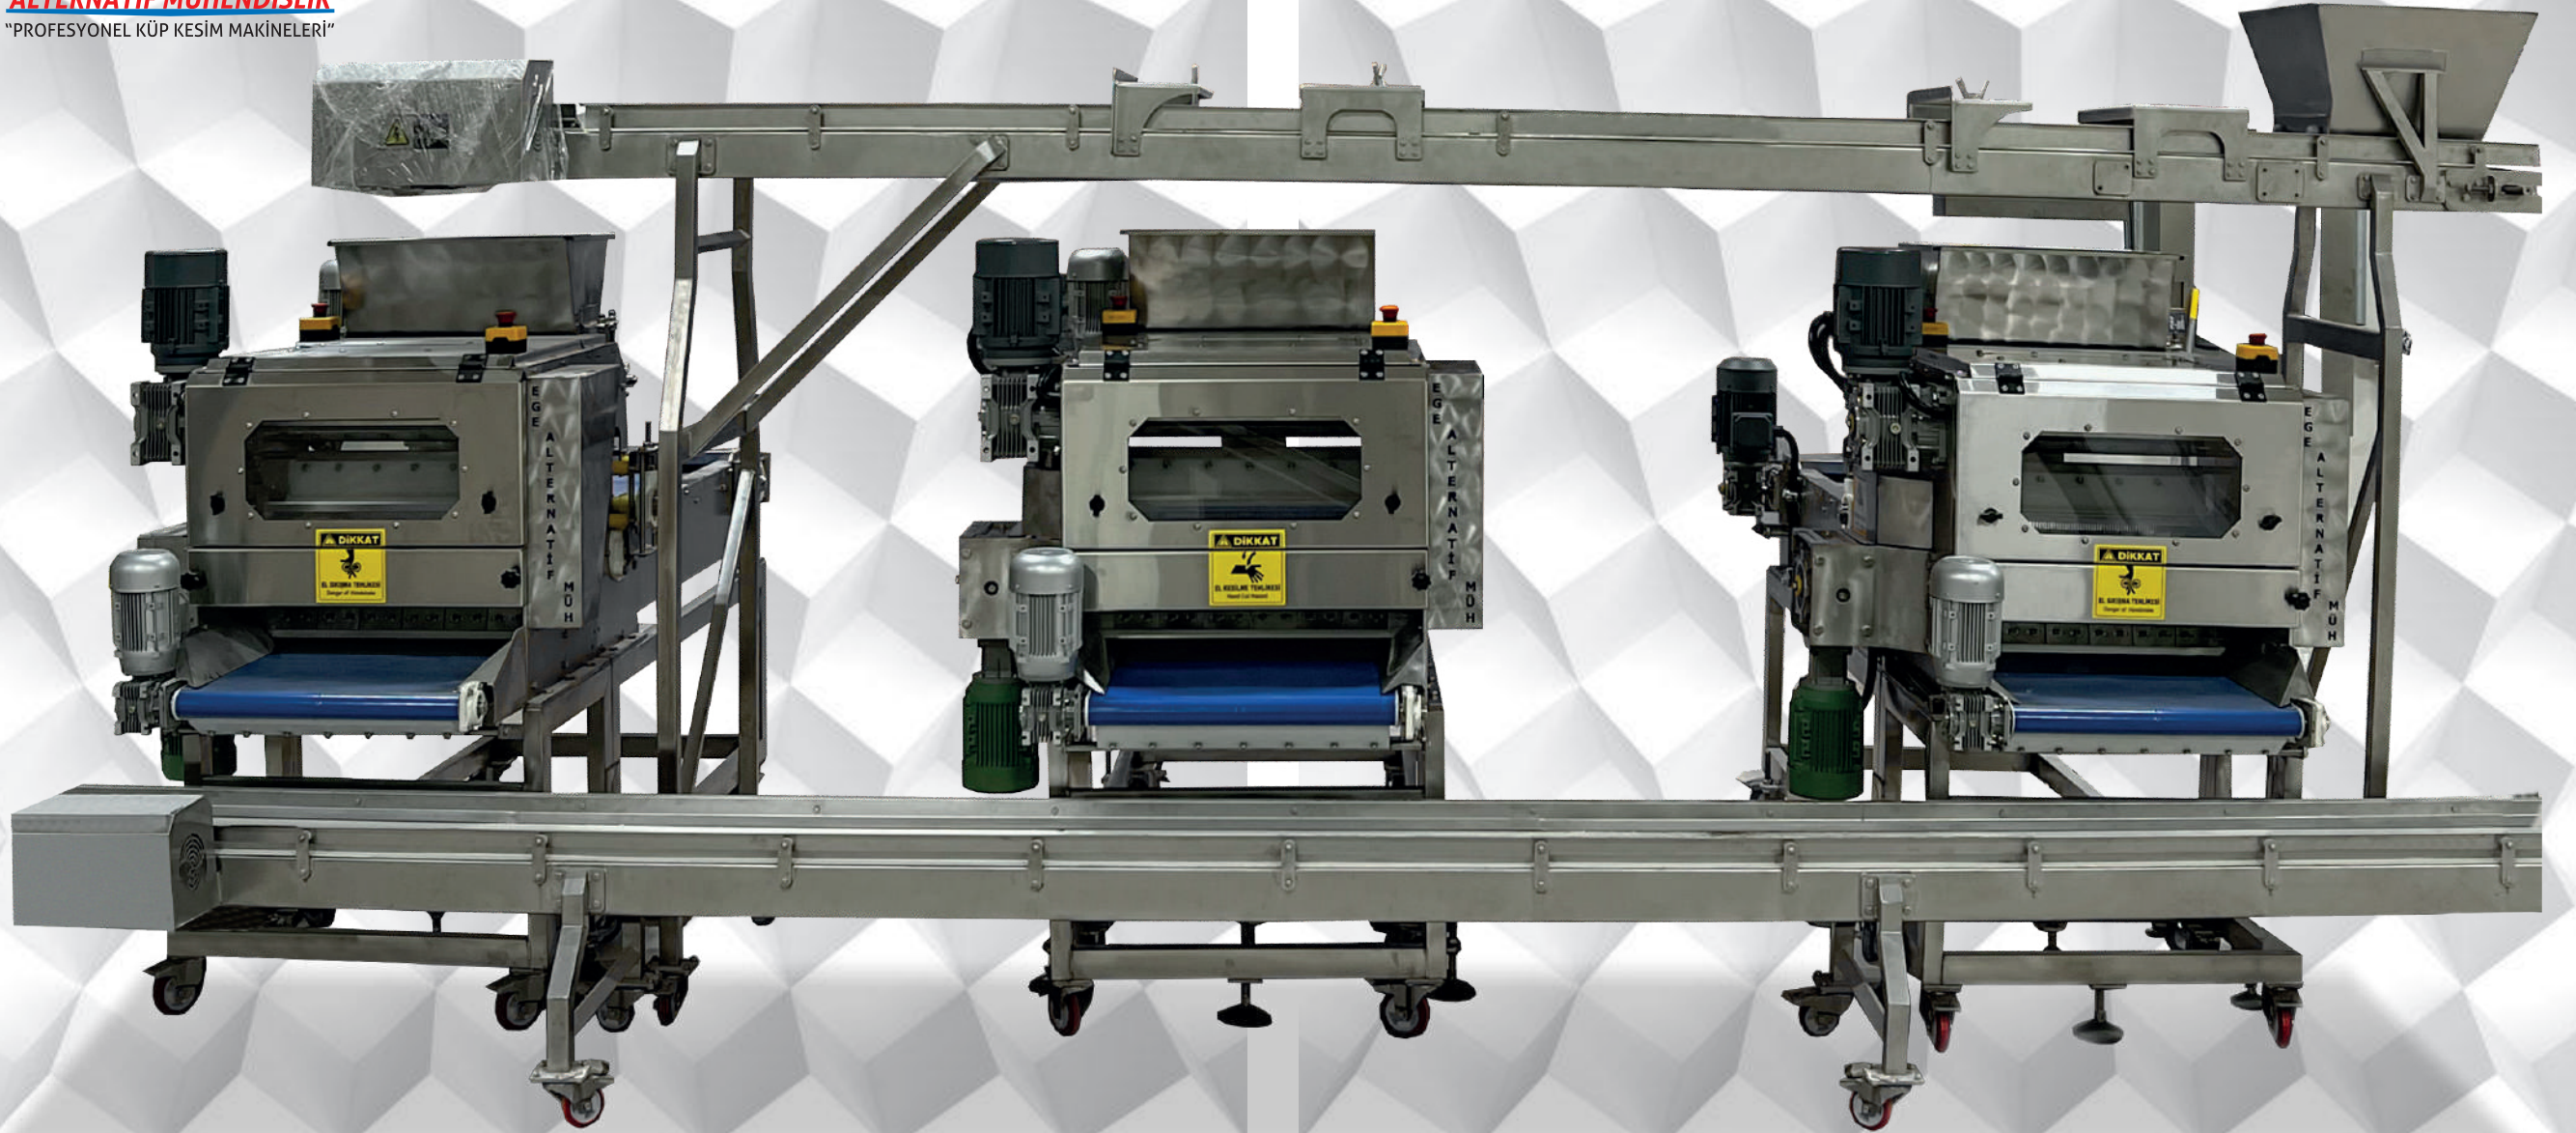

TECHNICAL SPECIFICATIONS:

- Cube Cutting Machines Body is 8 mm (AISI 304 CRNI) stainless chrome material
- Machine Width: 1100mm Length: 2200mm Height: 1650mm
- It is PLC screen controlled. CUBE and JULIEN cutting and washing modes are available in the desired size with a single touch.
- There are EMERGENCY STOP and safety switches on the front and rear covers.
- The upper blades are double-sided blades made of stainless steel. They are self-spares.
- Conveyor belt is blue P.P. food certified.
- The cutting machine works with 220 volt electricity.
- It has easy transport feature with wheels and adjustable foot stabilizer.
- The shaft assembly and bearing housings of the cutting machine are AISI 304 CRNI stainless chrome.
- Cutting blade dimensions are produced according to customer requests; special cutting dimensions with 2.5 x 2.5 - 3 x 3 - 4 x 4 mm cross-sections are produced.
- Special production can be made for 30x30 Turkish delight cutting.
- Our standard dimensions are 5 x 5, 6 x 6, 8 x 8, 10 x 10 mm cutting dimensions.
- Cutting capacity varies depending on the product to be cut.
- EXAMPLE: Cutting Size 8x8 blade = hour / 450-550 kg. (Varies according to the belt feeding structure.)

TEKNİK ÖZELLİKLER:

- KÜP KESİM MAKİNELERİ GÖVDE 8 MM (AISI 304 CRNI) PASLANMAZ KROM MALZEMEDİR.
- MAKİNE EN:1100MM BOY:2200 MM YÜKSEKLİK:1650MM
- PLC EKRAN KONTROLLÜDÜR. TEK TUŞLA İSTENİLEN ÖLÇÜDE KÜP VE JÜLIYEN KESİM VE YIKAMA MODU MEVCUTTUR.
- ÖN VE ARKA KAPAKLARDA ACİL STOP VE GÜVENLİK SWITCHLERİ BULUNMAKTADIR.
- ÜST BİÇAKLAR, BİÇAK ÇELİĞİ PASLANMAZ MALZEMEDEN ÜRETİLMİŞ OLUP ÇİFT YÖNLÜ BİÇAKLARDIR. KENDİNDEN YEDEKLİDİR.
- TAŞIYICI BANT MAVİ P.P. GIDAYA UYGUNLUK BELGELİDİR.
- KESME MAKİNASI 220 VOLT ELEKTRİKLE ÇALIŞIR.
- TEKERLEKLİ KOLAY TAŞINABİLİR ÖZELLİĞİ VE AYARLI AYAK SABİTLEME MEVCUTTUR.
- KESME MAKİNASININ, MİL AKSAMI VE RULMAN YATAKLARI AISI 304 CRNI PASLANMAZDIR.
- KESME BİÇAK ÖLÇÜLERİ MÜŞTERİ İSTEĞİNE GÖRE; 2,5 X 2,5 - 3 X 3 - 4 X 4 MM DOĞRULTUSUNDA ÖZEL KESİM ÖLÇÜLERİ ÜRETİMİ YAPILMAKTADIR.
- 30 X 30 LOKUM KESİMİ İÇİN ÖZEL ÜRETİM YAPILABİLMEKTEDİR.
- STANDART ÖLÇÜLERİMİZDE İSE; 5 X 5, 6 X 6, 8 X 8, 10 X 10 MM KESİM EBATLARI YAPILMAKTADIR.
- KESME KAPASİTESİ KESİLECEK ÜRÜNE GÖRE DEĞİŞİKLİK GÖSTERİR.
- ÖRNEK: KESME ÖLÇÜSÜ 8X8 BİÇAK = SAAT / 450-550 KG. (BAND BESLEME ORANINA GÖRE DEĞİŞKENLİK GÖSTERMEKTEDİR.)